

Pantera Series II Sand Filter

Manufactured in Australia, the Pantera sand filter is made from UV stabilised polyethylene.

Incorporating the proven Sta-Rite multiport valve and under-drain lateral system, these filters are ideal for small to large domestic swimming pools and aquaculture.

The reputation for durability and performance makes the Pantera range first choice for quality pool builders.

Typical Applications

- In Ground Pools from 30000 to 160000 litres
- Large Above Ground Pools
- Swim Spas
- Larger Spas



Seamless filter body

This one piece roto-moulded design is the benchmark for stability, strength and durability. Black by design, not by choice, incorporating increased strength from naturally UV stabilised material.

Under-drain laterals

Designed to give you maximum performance, the water filters down through the entire bed of sand to give superior filtration for sparkling clear water.

Stainless steel filter clamp

Stainless steel provides high quality, strength and corrosion resistance.

Durable seals and gaskets

Ultra low maintenance requirements, coupled with the smooth operation of the multiport valve when rotating through its functions, gives you "as new" operation for years to come.

6 position multiport valve

Total flexibility of operation including rinse cycle, ensuring clear filtration and a waste cycle to allow easy disposal of excess dirty water.

Barrel union pipe connection

Quick and easy connection and removal of pipe work.

Large in-line sight glass

Easily identifies the completion of the backwash cycle limiting the amount of water wastage.

Quality pressure gauge

Glycerine filled for longer gauge life.

Compatible with sand or Zelbrite


Zelbrite is an advanced filter media capable of filtering finer than sand for clearer, sparkling pool water.





Pantera Series II Sand Filter

Filter Head Loss Curve

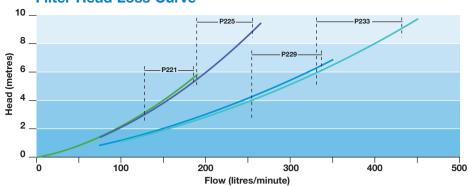



Operating Conditions

Fluid:	Water			
Maximum working pressure:	280 kPa*			
Water temperature range:	5°C − 38°C			
Ambient temperature:	55°C maximum			

*Cycle tested to greater than 45,000 cycles Note: Not suitable for in-floor cleaning systems.

Multiport Valve


Component	Material
Туре:	6 port
Body:	ABS
Handle:	ABS
Dowel pin:	304 stainless steel
Rotor:	Glass filled polypropylene
O-rings:	Nitrile
Sight glass:	Polycarbonate
Spider gasket:	Santoprene
Spring:	304 stainless steel
Washers:	304 stainless steel
Barrel unions:	ABS

Note: Some PVC jointing compounds are incompatible with ABS possibly causing

Filter

Component	Material
Filter body:	Polyethylene
Lateral:	ABS
Hub:	ABS
Centre stem:	UPVC
Tank clamp:	304 stainless steel
Pressure gauge: Type	50mm diameter glycerine filled
	bottom mount
Thre	ead 1/4" BSPT male
Ran	ge 0 – 270 kPa

Line Drawings



Dimension Table

Filter Valve Model		Α	В	С	D	D	
		Return Waste	Pump	Overall Height	Diameter	Service Height	
P21	SR14965-A003	685	755	840	535	1440	
P25	SR14965-A003	805	875	960	635	1560	
P29	SR14971-TM-22-L	858	940	1090	735	1690	
P33	SR14971-TM-22-L	938	1020	1170	835	1770	

Note: All dimensions in mm.

Connection Type	Dimensions				
	P21, P25	P29, P33			
Pump connection:	40mm slip PVC	50mm slip PVC			
Return connection:	40mm slip PVC	50mm slip PVC			
Waste connection:	40mm BSP male	50mm slip PVC			

Note: Unless specified otherwise, all dimensions in mm.

Filter Data

Filter Model	Max Flow Rate	Min* Flow Rate	Sand QTY	Sand Grade	Zelbrite Amount	Filter Area	Multiport Valve	Max Pressure
Unit of measure	(lpm)	(lpm)	(kg)		(kg)	(m²)	(mm - ports)	(kPa)
P21	165	125	90	16/30	70	0.205	40	280
P25	235	175	140	16/30	105	0.293	40	280
P29	320	240	185	16/30	140	0.397	50	280
P33	415	310	220	16/30	165	0.517	50	280

^{*}Minimum flow rate required for sufficient backwash of filters





AVAILABLE FROM:

Head Office Pentair AU/NZ: 1-21 Monash Drive,

Dandenong South, Vic 3175 **Australia** National Customer Service: Phone: 1300 137 344

1800 006 688 Phone: 1800 664 266 National Dealer Locator:

Email: au.sales@pentair.com Web: www.pentair.com.au

National Customer Service: Phone: 0800 654 112 0800 806 642 National Dealer Locator: Phone: 0800 664 269 Fmail: nz.sales@pentair.com Web: www.pentair.co.nz

International Australia/New Zealand

Phone: +61 3 9709 5800 +61 3 9709 5888